


**KEYNOTES**

1. DISTANCE TO FINISHED GRADE
  - 1.1. 1" IN TURF AREAS
  - 1.2. 2" IN PLANTER AREAS
2. THICKEN ALL EDGES AT LANDSCAPE AREAS
3. SILICONE CAULK CAP. MATCH CONCRETE COLOR
4. 1/2" FIBER EXPANSION JOINT (EJ)
5. #4X12" DOWEL - WRAP ONE SIDE TO SLIP IN CONC.- 24"cc MAX
6. #4 REBAR AT 24"cc EACH WAY
7. END REBAR 3" FROM EDGE OF SLAB AND EXPANSION JOINTS
8. 95% COMPACTED SUB-GRADE
9. TOOLED CONTROL JOINT (CJ)
10. TOOLED DEEP CONTROL JOINT (DCJ) SHALL BE 1/4 DEPTH OF TOTAL CONCRETE THICKNESS
11. MEDIUM BROOM FINISH
12. EXPOSED AGGREGATE - CACHE CREEK AGGREGATE OR EQ.

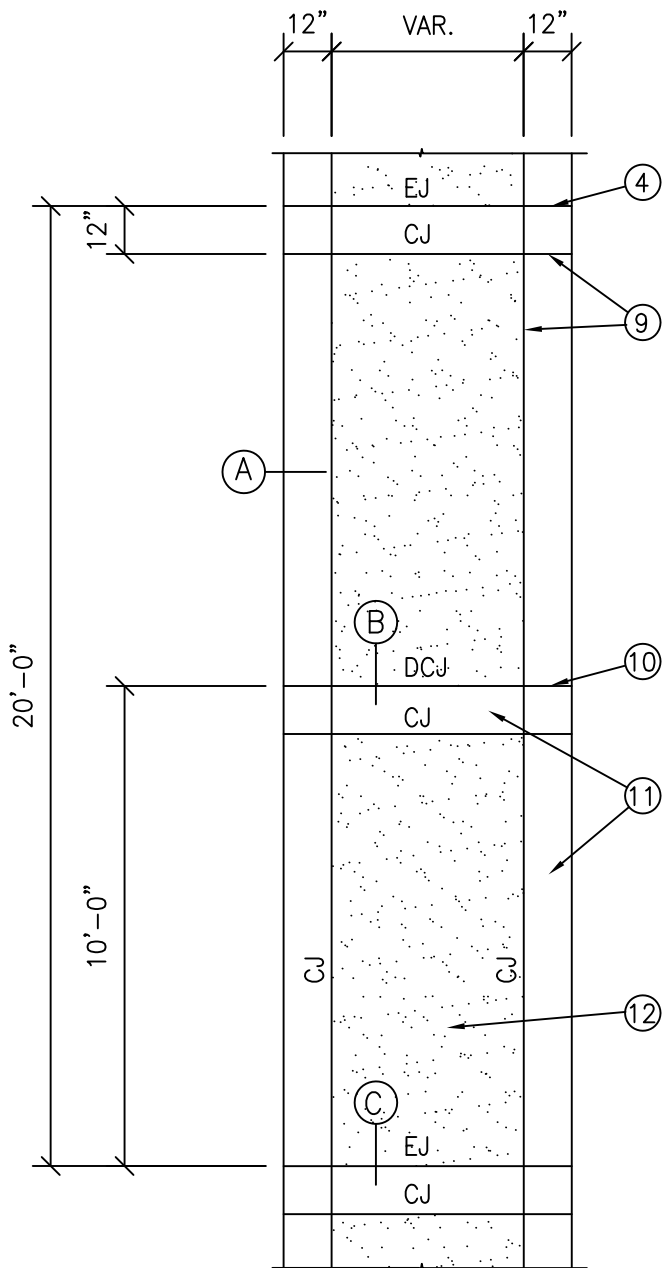

**GENERAL NOTES**

- A. MINOR PEDESTRIAN WALKS ARE SIMILAR FOR DCJ AND EJ SPACING. CJ SPACING SHALL BE 5'-0"cc MAX. OMIT LONGITUDINAL CJ AND EXPOSED AGGREGATE FINISH
- B. MINOR PEDESTRIAN WALKWAY FINISH SHALL BE MEDIUM BROOM FINISH SWEEPED PERPENDICULAR TO DIRECTION OF PATH
- C. COMPRESSIVE STRENGTH - 3000 PSI MIN.
- D. 1% MIN. AND 2% MAX. CROSS SLOPE
- E. WALKWAY SHALL NOT EXCEED 5% LONGITUDINAL SLOPE WITHOUT COMPLYING WITH THE CBC PROVISIONS FOR PEDESTRIAN RAMPS

<b>UNIVERSITY OF CALIFORNIA, DAVIS</b>		
<b>SIDEWALK DETAILS</b>		
REVISION: 1		
SCALE:	AS NOTED	DATE: JULY 11
DWN: CDA CHK: VG	APPROVED	FILE NO. H-01